

Mi Power Distribution Boards up to 630 A

- combinable enclosure system
- degree of protection IP 65
- made from polycarbonate
- protection class II, □
- in accordance with IEC 61439-2

Interfaces according to IEC 61439-2 and new product presentation	284 - 285
System description / System design	286 - 291
Overview product range	292 - 293
Empty enclosures	294 - 297
Empty enclosures with hinged lids	298 - 301
Circuit breaker boxes	
9 - 84 modules, with PE and N terminals	302 - 303
9 - 48 modules with hinged flaps, with PE and N terminals	304
12 - 84 modules, without PE and N terminals	305 - 306
12 - 48 modules, with hinged flaps, without PE and N terminals	307
for miniature circuit breakers (MCB)	308
12 - 84 modules, without PE and N terminals, with removable DIN rail rack and earth connection	309 - 310
12 - 48 modules with hinged flaps, without PE and N terminals, with removable DIN rail rack and earth connection	311
Accessories	312 - 331
Technical details	332 - 343



Further technical information can be found on the Internet
www.hensel-electric.de -> Products



NEW Interfaces according to IEC 61439-2

- For the protected outdoor installation
- Degree of protection IP 65
- Combinable enclosure system, extendible in all directions
- 6 enclosure sizes in a grid of 150 mm
- EMC compliant busbar system
- Wall- or floor-mounting
- Electrical functions intended to be operated by electrotechnical skilled / unskilled persons
- Protection class II up to a rated current of 630 A
- Flexible through standardised and tested kits
- Spacious connection areas

Installation and ambient conditions



Operation and maintenance

BLACK BOX
with the 4 interfaces
for the rating of
power switchgear
assemblies



Mi Power Distribution Board

Combinable enclosure system, insulation-enclosed, totally insulated, IP 65, **for the assembly of power switchgear and controlgear assemblies (PSC) up to 630 A in accordance with IEC 61439-2.**

The requirements of all installed electrical functions demonstrate compliance with the applicable requirements of IEC 61439-2.

I_{nc} and RDF must be specified in the documentation.

Electrical circuits and consumers



Connection to the electrical network

- Electric circuit / final circuit
- Circuit-breaker up to 630 A
- Switch disconnector up to 630 A
- Fuse switch disconnector up to 630 A
- Bus-mounted fuse base up to 63 A
- Connection with cable from above / from below
- Connection: conductors from copper / aluminium
- Optional connection of CEE sockets according to EN 60309 and sockets with earthing contact

- Rated voltage $U_N = 690 \text{ V a.c.} / 1000 \text{ V d.c.}$
- Rated current I_N bis 630 A
- Circuit-breaker up to 630 A
- Switch disconnector up to 630 A
- Fuse switch disconnector up to 630 A
- 5-conductor system
- Connection with cable from above / from below

NEW IEC 61439 causes new product presentation

IEC 61439 - the standard for the assembly of switchgear assemblies and distribution boards - determines the safety requirements for electrical equipment for the compliance of protection objectives for people and facilities. Requirements for products are more clearly defined and a new terminology is introduced.

BLACK BOX Specification

The designer specifies a switchgear assembly by defining the interface parameters as BLACK BOX.

Based on these interface specifications the manufacturer of a switchgear assembly has to rate and define the structure of the switchgear assembly.

Product presentation in media changed significantly

The standard has an effect as well on the documentation of products. Additional information, such as the rated current of circuits and the number of circuits, are now listed for each product as they are now required by designers and manufacturers for the construction of switchgear assemblies.

This catalog presents Mi empty- and circuit breaker boxes.

Further enclosures with electrical functions for the assembly of Mi power distribution boards up to 630 A, for example, with built-in busbars, circuit breakers, etc., see at: www.hensel-electric.de



Further technical information can be found on the Internet

www.hensel-electric.de -> Products



Power distribution boards up to 630 A as power switchgear and controlgear assembly (PSC) in accordance with IEC 61 439 Part 2



Mi Distribution boards are particularly suitable for the application in challenging industrial and demanding ambient conditions and difficult environments.



Mi Distribution boards are dust and water-resistant and can withstand the highest loads.



All enclosures with transparent or opaque lids

Mi Power distribution boards up to 630 A

combinable enclosure system
insulation-enclosed, total insulated, degree of protection IP 65,
for the assembly of power switchgear and controlgear assembly (PSC)
up to 630 A in accordance with IEC 61 439 Part 2

- Boxes can also be used as a single box
- Degree of protection IP 65: dust-proof and jet water-proof
- **Application area: Mi enclosures are suitable for for the protected outdoor installation - harsh environment and /or outdoor.**

Material:

- Polycarbonate
- Burning behaviour: Glow wire test in accordance with IEC 60 695-2-11, self-extinguishing, flame-retardant
- UV-resistance in accordance with IEC 61 439-1, Clause 10.2.4: The material is examined for UV resistance.
- Toxic behaviour: silicone- and halogen-free
- Chemical resistance: resistant against acid, lye, benzene and mineral oil

Enclosure System:

- Covers made from thermoplastic
- Covers with protected and captive marking labels
- Cover plates for mounting electrical equipment
- Large wall openings enable the wiring within the distribution boards
- Cable entry via metric knockouts in all box walls, via flanges with metric knockouts or elastic membranes or cable inserts with up to 74 mm cable diameter
- Wall fixing right away in the boxes, via external brackets or via mounting profiles
- Facility for lead seal and locking
- Hinges for lids and heavy-duty hinge joints for operating installation device within a large area
- Connection Box for the installation of devices that must be operated externally, such as plugs, pushbuttons and switches
- Mi empty boxes and single empty boxes conform to the RoHS Directive 2011/65/EC

	Environmental conditions	<p>Ambient temperatures</p> <ul style="list-style-type: none"> ■ for distribution boards in accordance with IEC 61 439: -5° C up to 35° C, max. + 40° C humidity: 50% at 40° C, 100% at 25° C ■ for empty enclosures: - 25°C up to + 70° C <p>The rated insulation voltage is possibly reduced by the installed equipment technology</p>
	Application area	<p>The enclosures are suitable for the protected outdoor installation - harsh environment and / or protected outdoor. However the climatic influences and effects on the equipment are to be considered, see Technical Details: Operating and Ambient Conditions</p>
	Insulation	<p>Insulated enclosures (Protection class II) </p>
	Impact strength	<p>Degree of protection against mechanical load IK 08 (5 Joule) in accordance with IEC 62 262</p>
	Protection against foreign solid objects and direct contact	<p>Dust-proof Degree of protection IP 65</p>
	Protection against ingress of water with harmful effects	<p>Protected against water Degree of protection IP 65 <i>Note: Single enclosures without any flanges and components mounted in the lid provide degree of protection IP 66</i></p>
	Electrical parameters	<p>Rated current: 630 A Rated insulation voltage: AC 690 V a.c., DC 1000 V d.c.*, IEC 60 664 * The rated insulation voltage is possibly reduced by the installed equipment technology</p>

Material: Polycarbonate

	Burning behaviour	<p>Glow wire test 960°C in accordance with IEC 60 695-2-11, f flame-retardant, self-extinguishing, UL Subject 94, V-2</p>
	UV resistance	<p>UV resistance according to IEC 61 439-1 The material is examined for UV resistance</p>
	Chemical resistance	<p>Resistance against acid 10% and lye 10%, petrol and mineral oil</p>
	Toxic behaviour	<p>Silicone- and halogen-free</p>

Dependent on the system

Dependent on material


Combinable and extendable in all directions

Application examples




Mi Distribution boards

- modular enclosure system in grid of 150 mm
- 5 enclosure sizes: 150 x 300 mm, 300 x 300 mm, 450 x 300 mm, 600 x 300 mm, 600 x 450 mm and 600 x 600 mm
- for the assembly of power switchgear and controlgear assemblies (PSC) up to 630 A
- Enclosures can be used as well as single boxes.

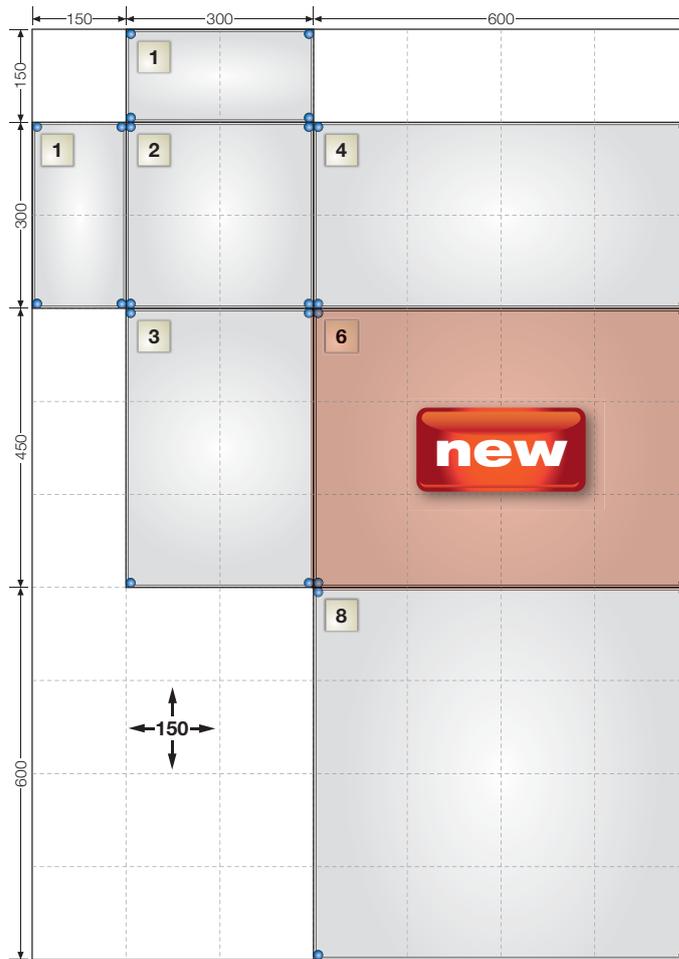

The **modular design** in a basic grid of 150 mm allows free design of the outer form. The enclosures can be combined in all directions. Obstacles at the building structure can be easily circumvented.

Different enclosure depths allow the installation of equipment of different heights (Fig. 1). With an extension frame the depth of the enclosure sizes 4 and 8 can be extended by 85 mm (Fig. 2).

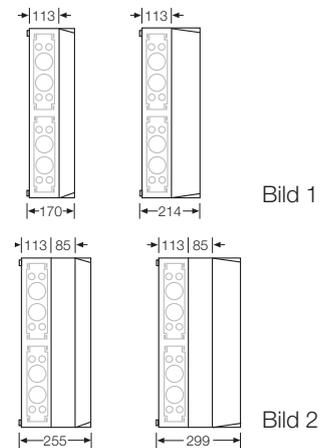

Assignment of box walls:


The assignment of box walls is effected via wall symbols that are assigned to each product. The individual figures **2** give an indication, which wall is concerned.

All box walls are listed in the fold-out of the coverpages.



ENYMOD Mi Distribution boards Box walls with metric cable entries

- | | |
|--|--|
| Wall 1 | |
| 1 x M 20
1 x M 32/40 | |
| Wall 2 | |
| 2 x M 20
10 x M 25
1 x M 32/40 | |
| Wall 3 | |
| 4 x M 25
3 x M 40/50 | |
| Wall 4 | |
| 1 x M 20
4 x M 25
1 x M 32/40
3 x M 40/50 | |
| Wall 5 | |
| 8 x M 32
4 x M 40/50 | |
| Wall 6 | |
| 4 x M 20
20 x M 25
2 x M 32/40 | |



new Enclosure size 6 (600x450 mm)

Due to an enlarged terminal compartment directly in the housing, some electrical functions can be installed more economical.

An additional enclosure for wiring is not necessary.

Mi empty boxes conform to the RoHS Directive 2011/65/EC, for more information, refer to technical data.



ENYDASE

ENYDARD

ENYSTAR

ENYMOD

ENYEST



■ Equipment can be installed via DIN rails which are fastened on spacers



■ Equipment can be installed via mounting plates as well



■ Installation of equipment in cover plates



■ Boxes can be assembled to larger units



■ Blanking strips (attached) for unused sections in equipment openings of protection covers



■ Facilities for earth connection according to British Standard

Technical Data

Types

**Mi Distribution Boards
Overview Product Range
Empty Boxes**

Empty boxes



Mi 0100
built-in dimensions
275x125x146 mm



Mi 0200
built-in dimensions
275x275x146 mm



Mi 0210
built-in dimensions
275x275x191 mm



Mi 0220
built-in dimensions
275x275x115 mm
hinged lid



Mi 0300
built-in dimensions
275x425x146 mm



Mi 0310
built-in dimensions
275x425x191 mm



Mi 0400
built-in dimensions
275x575x146 mm



Mi 0410
built-in dimensions
275x575x191 mm



NEW
Mi 0600
built-in dimensions
575x425x146 mm



Mi 0800
built-in dimensions
575x575x146 mm

Empty boxes



Mi 0101
built-in dimensions
275x125x146 mm



Mi 0201
built-in dimensions
275x275x146 mm



Mi 0211
built-in dimensions
275x275x191 mm



Mi 0221
built-in dimensions
275x275x115 mm
hinged lid



Mi 0301
built-in dimensions
275x425x146 mm



Mi 0311
built-in dimensions
275x425x191 mm



Mi 0401
built-in dimensions
275x575x146 mm



Mi 0411
built-in dimensions
275x575x191 mm



NEW
Mi 0601
built-in dimensions
575x425x146 mm



Mi 0801
built-in dimensions
575x575x146 mm

**Empty boxes
with hinged lids**



Mi 9100
built-in dimensions
122x272x146 mm,
hinged lid



Mi 9200
built-in dimensions
275x275x146 mm,
hinged lid



Mi 9210
built-in dimensions
275x275x191 mm,
hinged lid



Mi 9300
built-in dimensions
275x425x146 mm,
hinged lid



Mi 9310
built-in dimensions
275x425x191 mm,
hinged lid



Mi 9400
built-in dimensions
275x575x146 mm,
hinged lid



Mi 9410
built-in dimensions
275x575x191 mm,
hinged lid

**Empty boxes
with hinged lids**



Mi 9101
built-in dimensions
122x272x146 mm,
hinged lid



Mi 9201
built-in dimensions
275x275x146 mm,
hinged lid



Mi 9211
built-in dimensions
275x275x191 mm,
hinged lid



Mi 9301
built-in dimensions
275x425x146 mm,
hinged lid



Mi 9311
built-in dimensions
275x425x191 mm,
hinged lid



Mi 9401
built-in dimensions
275x575x146 mm,
hinged lid



Mi 9411
built-in dimensions
275x575x191 mm,
hinged lid

Empty boxes with hinged lids applicable as single empty box for the installation of device via DIN rails or mounting plates. The lid keeps permanently connected to the box. Built-in devices can be easily operated and for example measurements conveniently carried out with both hands.

Mi Distribution Boards Overview Product Range Circuit Breaker Boxes

Circuit breaker boxes

-  **Mi 1109**
1x9x18 mm,
PE+N
-  **Mi 1112**
1x12x18 mm,
PE+N
-  **Mi 1115**
1x12x18 mm
without PE+N
-  **Mi 1224**
2x12x18 mm,
PE+N
-  **Mi 1225**
2x12x18 mm
without PE+N
-  **Mi 1220**
2x12x18 mm,
PE+N,
Scharnierdeckel
-  **Mi 1226**
2x12x18 mm
without PE+N,
hinged lid
-  **Mi 1336**
3x12x18 mm,
PE+N
-  **Mi 1335**
3x12x18 mm
without PE+N
-  **Mi 1448**
4x12x18 mm,
PE+N
-  **Mi 1440**
3x12x18 mm,
1 DIN rail,
without PE+N
-  **Mi 1456 ***
2x28x18 mm,
PE+N
-  **Mi 1455 ***
2x28x18 mm
without PE+N
-  **NEW Mi 1684 ***
2x28x18 mm and
2x12x18 mm
PE+N
-  **NEW Mi 1683 ***
2x28x18 mm and
2x12x18 mm
without PE+N
-  **Mi 1884 ***
3x28x18 mm,
PE+N
-  **Mi 1885 ***
3x28x18 mm
without PE+N

Circuit breaker boxes with hinged flaps

-  **Mi 1111**
1x12x18 mm,
PE+N,
1 hinged lid
-  **Mi 1117**
1x12x18 mm,
without PE+N,
1 hinged flap
-  **Mi 1222**
2x12x18 mm,
PE+N,
2 hinged flaps
-  **Mi 1227**
2x12x18 mm,
without PE+N,
2 hinged flaps
-  **Mi 1333**
3x12x18 mm,
PE+N,
3 hinged flaps
-  **Mi 1337**
3x12x18 mm,
without PE+N,
3 hinged flaps
-  **Mi 1444**
4x12x18 mm,
PE+N,
4 hinged flaps
-  **Mi 1445**
4x12x18 mm,
without PE+N,
4 hinged flaps
-  **Mi 1443**
3x12x18 mm,
1 DIN rail,
without PE+N,
3 hinged flaps
-  **Mi 1281**
for miniature
circuit breakers
1x6x18 mm,
PEN

Circuit breaker boxes with removable DIN rail rack and earth connection

-  **Mi 1118 ***
1x12x18 mm,
without PE+N
-  **Mi 1228 ***
2x12x18 mm,
without PE+N
-  **Mi 1221 ***
2x12x18 mm,
without PE+N
with hinged lid
-  **Mi 1338 ***
3x12x18 mm,
without PE+N
-  **Mi 1446 ***
4x12x18 mm,
without PE+N
-  **Mi 1455 ***
2x28x18 mm,
without PE+N
-  **NEW Mi 1686 ***
2x28x18 mm and
2x12x18 mm
-  **Mi 1885 ***
3x28x18 mm,
without PE+N

Circuit breaker boxes with hinged flaps, with removable DIN rail rack and earth connection

-  **Mi 1119 ***
1x12x18 mm,
without PE+N,
1 hinged flap
-  **Mi 1229 ***
2x12x18 mm,
without PE+N,
2 hinged flaps
-  **Mi 1339 ***
3x12x18 mm,
without PE+N,
3 hinged flaps
-  **Mi 1449 ***
4x12x18 mm,
without PE+N,
4 hinged flaps



* With removable DIN rail rack or earth connection


Circuit breaker boxes for the installation of DIN rail equipment in accordance with DIN 43880 from 9 to 84 modules.
Unused DIN rail openings in covers are stripped with attached blanking strips.



Mi 0100

Built-in dimensions W 275 x H 125 x D 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 1
- please order DIN rails, mounting plates or covers additionally
- with transparent lid
- lid fasteners for tool operation

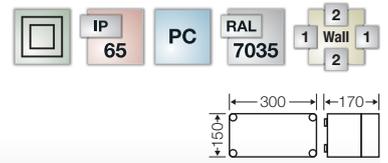

Mi 0200

Built-in dimensions W 275 x H 275 x T 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- with transparent lid
- lid fasteners for tool operation

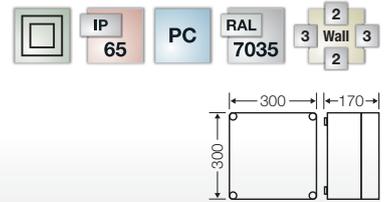

Mi 0210

Built-in dimensions W 275 x H 275 x D 195 mm


- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- with transparent lid
- lid fasteners for tool operation

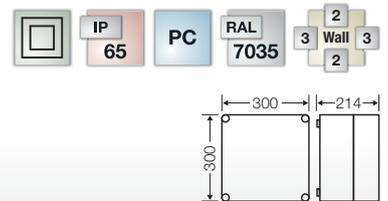

Mi 0220

Built-in dimensions W 275 x H 275 x D 119 mm


- max. installation depth with built-in mounting plate 115 mm, with built-in DIN rail 104 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- with hinged lid for built-in equipment with protection cover which must be operated
- with transparent lid
- lid fasteners for tool operation

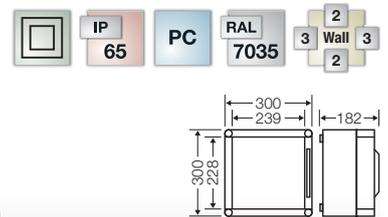

Mi 0300

Built-in dimensions W 275 x H 425 x D 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 3
- please order DIN rails, mounting plates or covers additionally
- with transparent lid
- lid fasteners for tool operation

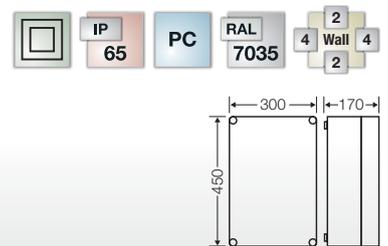

Mi 0310

Built-in dimensions W 275 x H 425 x D 195 mm

- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 3
- please order DIN rails, mounting plates or covers additionally
- with transparent lid
- lid fasteners for tool operation

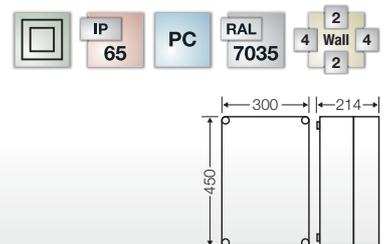




Mi 0400

Built-in dimensions W 275 x H 575 x D 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 4
- please order DIN rails, mounting plates or covers additionally
- with transparent lid
- lid fasteners for tool operation



Mi 0410

Built-in dimensions W 275 x H 575 x D 195 mm


- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 4
- please order DIN rails, mounting plates or covers additionally
- with transparent lid
- lid fasteners for tool operation



Mi 0600 NEW

Built-in dimensions W 575 x H 425 x T 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 6
- please order DIN rails, mounting plates or covers additionally
- with transparent lid
- lid fasteners for tool operation



Mi 0800

Built-in dimensions W 575 x H 575 x D 150 mm

- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 8
- please order DIN rails, mounting plates or covers additionally
- cable entry only possible via flange
- with transparent lid
- lid fasteners for tool operation






Mi 0101

Built-in dimensions W 275 x H 125 x D 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 1
- please order DIN rails, mounting plates or covers additionally
- with opaque lid
- lid fasteners for tool operation

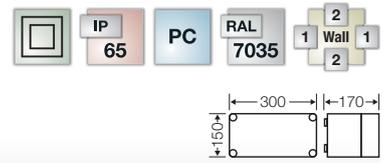

Mi 0201

Built-in dimensions W 275 x H 275 x T 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- with opaque lid
- lid fasteners for tool operation

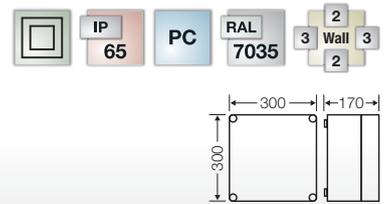

Mi 0211

Built-in dimensions W 275 x H 275 x D 195 mm


- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- with opaque lid
- lid fasteners for tool operation

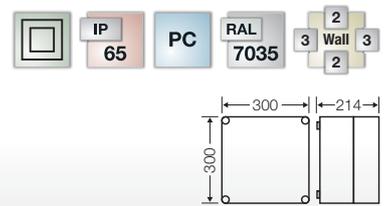

Mi 0221

Built-in dimensions W 275 x H 275 x D 119 mm


- max. installation depth with built-in mounting plate 115 mm, with built-in DIN rail 104 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- with hinged lid for built-in equipment with protection cover which must be operated
- with opaque lid
- lid fasteners for tool operation

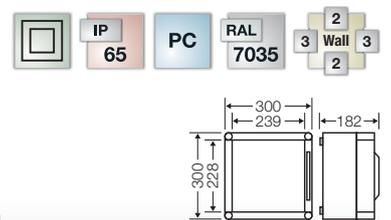

Mi 0301

Built-in dimensions W 275 x H 425 x D 150 mm

- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 3
- please order DIN rails, mounting plates or covers additionally
- with opaque lid
- lid fasteners for tool operation

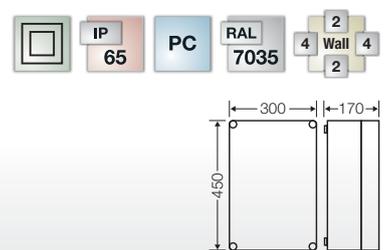




Mi 0311

Built-in dimensions W 275 x H 425 x D 195 mm


- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 3
- please order DIN rails, mounting plates or covers additionally
- with opaque lid
- lid fasteners for tool operation



Mi 0401

Built-in dimensions W 275 x H 575 x D 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 4
- please order DIN rails, mounting plates or covers additionally
- with opaque lid
- lid fasteners for tool operation



Mi 0411

Built-in dimensions W 275 x H 575 x D 195 mm


- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 4
- please order DIN rails, mounting plates or covers additionally
- with opaque lid
- lid fasteners for tool operation



Mi 0601 NEW

Einbaumaße B 575 x H 425 x T 150 mm


- max. Einbautiefe bei eingebauter Montageplatte 146 mm, bei eingebauter Tragschiene 135 mm
- Gehäusegröße 6
- Tragschienen, Montageplatten oder Abdeckungen zusätzlich bestellen
- mit nicht durchsichtigem Deckel
- Deckelverschlüsse für Werkzeugbetätigung



Mi 0801

Built-in dimensions W 575 x H 575 x D 150 mm

- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 8
- please order DIN rails, mounting plates or covers additionally
- cable entry only possible via flange
- with opaque lid
- lid fasteners for tool operation




**Mi Distribution Boards
Empty Boxes
with Hinged, Transparent Lid**




Mi 9100
Built-in dimensions W 125 x H 275 x D 150 mm

- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 1
- please order DIN rails, mounting plates or covers additionally
- 3 walls with metric knockouts for cable entry and assembly
- trilaterally combinable
- lid hinges attached
- with transparent, hinged lid
- lid fasteners for tool operation

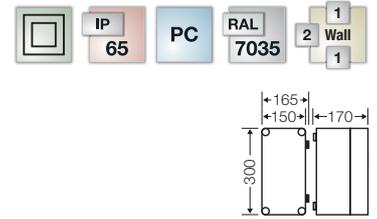


Mi 9200
Built-in dimensions W 275 x H 275 x T 150 mm

- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with transparent, hinged lid
- lid fasteners for tool operation

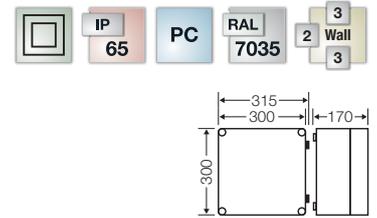


Mi 9210
Built-in dimensions W 275 x H 275 x D 195 mm

- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with transparent, hinged lid
- lid fasteners for tool operation

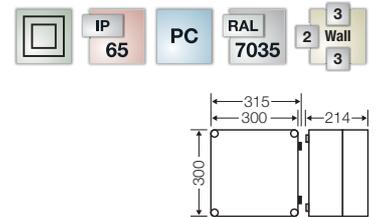

Mi 9300
Built-in dimensions W 275 x H 425 x D 150 mm

- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 3
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with transparent, hinged lid
- lid fasteners for tool operation

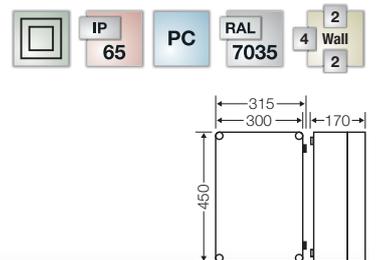


**Mi Distribution Boards
Empty Boxes
with Hinged, Transparent Lid**



Mi 9310

Built-in dimensions W 275 x H 425 x D 195 mm


- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 3
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with transparent, hinged lid
- lid fasteners for tool operation

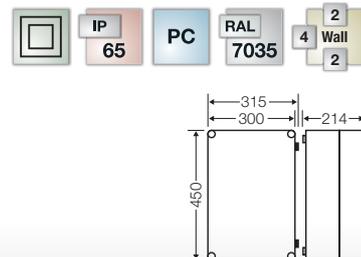

Mi 9400

Built-in dimensions W 275 x H 575 x D 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 4
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with transparent, hinged lid
- lid fasteners for tool operation

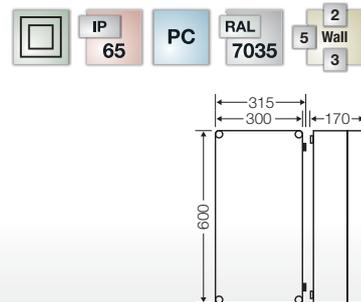

Mi 9410

Built-in dimensions W 275 x H 575 x D 195 mm

- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 4
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with transparent, hinged lid
- lid fasteners for tool operation

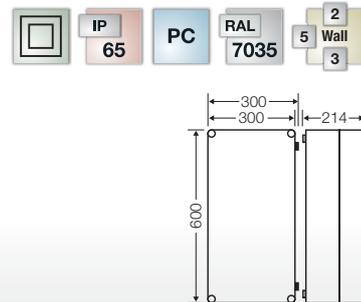

Assembly example: Empty boxes with hinged lids

Applicable as single empty box for the installation of device via DIN rails or mounting plates. Easy and fast assembly. Lid suitable for the installation of signallers.




**Mi Distribution Boards
Empty Boxes
with Hinged, Opaque Lid**



Mi 9101

Built-in dimensions W 125 x H 275 x D 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 1
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with opaque, hinged lid
- lid fasteners for tool operation



Mi 9201

Built-in dimensions W 275 x H 275 x T 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with opaque, hinged lid
- lid fasteners for tool operation



Mi 9211

Built-in dimensions W 275 x H 275 x D 195 mm


- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 2
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with opaque, hinged lid
- lid fasteners for tool operation



Mi 9301

Built-in dimensions W 275 x H 425 x D 150 mm

- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 3
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with opaque, hinged lid
- lid fasteners for tool operation




**Mi Distribution Boards
Empty Boxes
with Hinged, Opaque Lid**



Mi 9311

Built-in dimensions W 275 x H 425 x D 195 mm


- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 3
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with opaque, hinged lid
- lid fasteners for tool operation



Mi 9401

Built-in dimensions W 275 x H 575 x D 150 mm


- max. installation depth with built-in mounting plate 146 mm, with built-in DIN rail 135 mm
- box size 4
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with opaque, hinged lid
- lid fasteners for tool operation



Mi 9411

Built-in dimensions W 275 x H 575 x D 195 mm

- max. installation depth with built-in mounting plate 191 mm, with built-in DIN rail 180 mm
- box size 4
- please order DIN rails, mounting plates or covers additionally
- trilaterally combinable
- 3 walls with metric knockouts for cable entry and assembly
- lid hinges attached
- with opaque, hinged lid
- lid fasteners for tool operation



Assembly example: Empty boxes with hinged lids


Applicable as single empty box for the installation of device via DIN rails or mounting plates. Easy and fast assembly. Lid suitable for the installation of signalers.






Mi 1109
9 modules: 1 x 9 x 18 mm

- 1-row
- FIXCONNECT® plug-in terminal technology for PE and N
- PE/N 2 x 25 mm², 8 x 4 mm², Cu each
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation

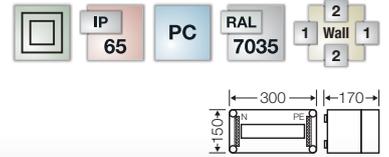


Mi 1112
12 modules: 1 x 12 x 18 mm

- 1-row
- with screw-type terminals for PE/N, for copper conductors
- per PE/N 10 x 16 mm², Cu
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation

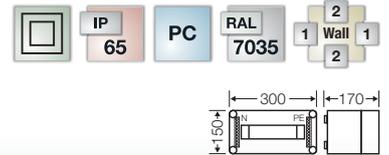


Mi 1224
24 modules: 2 x 12 x 18 mm

- 2-row
- FIXCONNECT® plug-in terminal technology for PE and N
- per PE/N 3 x 25 mm², 12 x 4 mm², Cu
- N separable for various potentials
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation

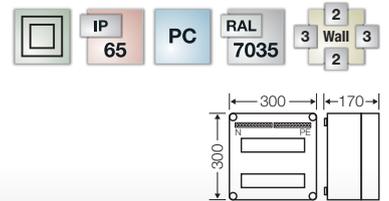


Mi 1220
24 modules: 2 x 12 x 18 mm

- 2-row
- with hinged lid
- FIXCONNECT® plug-in terminal technology for PE and N
- per PE/N 3 x 25 mm², 12 x 4 mm², Cu
- N separable for various potentials
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation

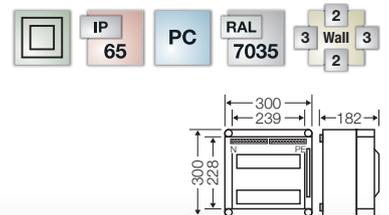


Mi 1336
36 modules: 3 x 12 x 18 mm

- 3-row
- FIXCONNECT® plug-in terminal technology for PE and N
- per PE/N 6 x 25 mm², 24 x 4 mm², Cu
- N separable for various potentials
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation

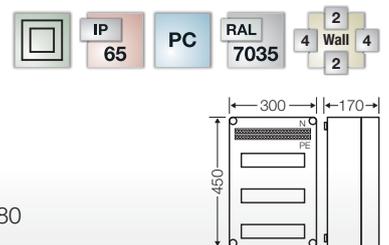

Mi 1448
48 modules: 4 x 12 x 18 mm

- 4-row
- FIXCONNECT® plug-in terminal technology for PE and N
- per PE/N 6 x 25 mm², 24 x 4 mm², Cu
- N separable for various potentials
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation

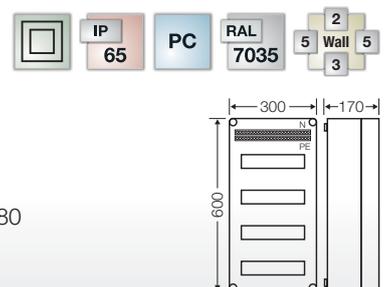




Mi 1456

56 modules: 2 x 28 x 18 mm


- 2-row
- FIXCONNECT® plug-in terminal technology for PE and N
- per PE/N 6 x 25 mm², 24 x 4 mm², Cu
- N separable for various potentials
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed

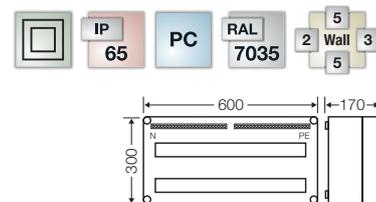

Mi 1684 NEW

80 modules: 2 x 28 x 18 mm and 2 x 12 x 18 mm


- 3-row
- FIXCONNECT® plug-in terminal technology for PE and N
- per PE/N 6 x 25 mm², 24 x 4 mm², Cu
- N separable for various potentials
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed
- cable entry only possible via flange

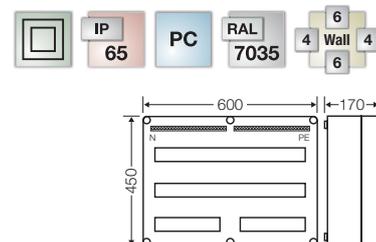

Mi 1884

84 modules: 3 x 28 x 18 mm

- 3-row
- FIXCONNECT® plug-in terminal technology for PE and N
- per PE/N 6 x 25 mm², 24 x 4 mm², Cu
- N separable for various potentials
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed
- cable entry only possible via flange




Assembly example:
Removable DIN rail rack for earth connection




Mi 1111
12 modules: 1 x 12 x 18 mm

- 1-row
- with 1 hinged flap
- hinged flap lockable with accessories
- with screw-type terminals for PE/N, for copper conductors
- per PE/N 10 x 16 mm², Cu
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation

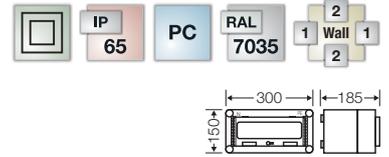


Mi 1222
24 modules: 2 x 12 x 18 mm

- 2-row
- with 2 hinged flaps
- hinged flap lockable with accessories
- FIXCONNECT® plug-in terminal technology for PE and N
- per PE/N 3 x 25 mm², 12 x 4 mm², Cu
- N separable for various potentials
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation

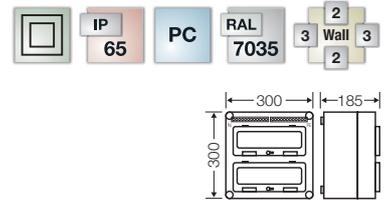


Mi 1333
36 modules: 3 x 12 x 18 mm

- 3-row
- with 3 hinged flaps
- hinged flap lockable with accessories
- FIXCONNECT® plug-in terminal technology for PE and N
- per PE/N 6 x 25 mm², 24 x 4 mm², Cu
- N separable for various potentials
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation

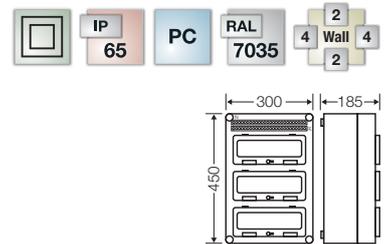

Mi 1444
48 modules: 4 x 12 x 18 mm

- 4-row
- with 4 hinged flaps
- hinged flap lockable with accessories
- FIXCONNECT® plug-in terminal technology for PE and N
- per PE/N 6 x 25 mm², 24 x 4 mm², Cu
- N separable for various potentials
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation

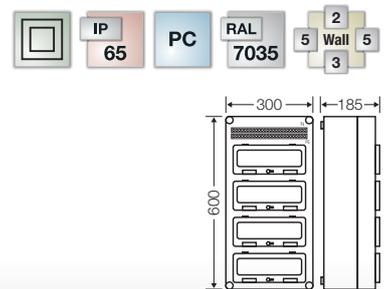




Mi 1115

**12 modules: 1 x 12 x 18 mm
without PE and N terminal**


- 1-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation



Mi 1225

**24 modules: 2 x 12 x 18 mm
without PE and N terminal**


- 2-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation



Mi 1226

**24 modules: 2 x 12 x 18 mm
without PE and N terminal
with hinged lid**


- 2-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation



Mi 1335

**36 modules: 3 x 12 x 18 mm
without PE and N terminal**


- 3-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation



Mi 1440

**36 modules: 3 x 12 x 18 mm
without PE and N terminal
with additional DIN rail**

- 4-row
- with 1 DIN rail 216 mm wide (for installation depth of 72 mm)
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation






Mi 1455

**56 modules: 2 x 28 x 18 mm
without PE and N terminal**


- 2-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection



Mi 1683 NEW

**80 modules: 2 x 28 x 18 mm and
2 x 12 x 18 mm
without PE and N terminal**


- 3-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- cable entry only possible via flange



Mi 1885

**84 modules: 3 x 28 x 18 mm
without PE and N terminal**

- 3-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- cable entry only possible via flange




Assembly example:
Removable DIN rail rack for earth connection



Mi 1117

**12 modules: 1 x 12 x 18 mm
without PE and N terminal**


- 1-row
- with 1 hinged flap
- hinged flap lockable with accessories
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation



Mi 1227

**24 modules: 2 x 12 x 18 mm
without PE and N terminal**


- 2-row
- with 2 hinged flaps
- hinged flap lockable with accessories
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation



Mi 1337

**36 modules: 3 x 12 x 18 mm
without PE and N terminal**


- 3-row
- with 3 hinged flaps
- hinged flap lockable with accessories
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation



Mi 1443

**36 modules: 3 x 12 x 18 mm
without PE and N terminal
with additional DIN rail**


- 4-row
- with 3 hinged flaps
- hinged flap lockable with accessories
- with 1 DIN rail 216 mm wide (for installation depth of 72 mm)
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation



Mi 1445

**48 modules: 4 x 12 x 18 mm
without PE and N terminal**

- 4-row
- with 4 hinged flaps
- hinged flap lockable with accessories
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation






Mi 1281

**6 modules: 1 x 6 x 18 mm
for miniature circuit breakers (MCB)**

- 1-row
- with 1-pole main branch terminal for copper conductors
- protection cover can be sealed, with lockable cover strip
- lid fasteners for hand operation
- PEN 2 x 25 mm², 2 x 16 mm², Cu, round conductors



ENYKASE

ENYBOARD

ENYSTAR

ENYMOD


ENYEST

Technical Data


Types

Note:


Prepared for the installation of currently commercially available miniature circuit-breakers (MDB)



for example
ABN Type XHA 3..-4
Hager Type HTN..E
etc.
SHA
(voltage dependent)



for example
ABB Type S 701/S 703
+ adapter for DIN rail
S 700 BT3
(1 pc. for S 701, 2 pc. for S 703)
SHU (voltage dependent)




for example
ABB Type S 80.-...
SHU (voltage dependent)



Mi 1118

**12 modules: 1 x 12 x 18 mm
without PE and N terminal**


- 1-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed



Mi 1228

**24 modules: 2 x 12 x 18 mm
without PE and N terminal**


- 2-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed



Mi 1221

**24 modules: 2 x 12 x 18 mm
without PE and N terminal
with hinged lid**


- 2-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed



Mi 1338

**36 modules: 3 x 12 x 18 mm
without PE and N terminal**

- 3-row
- for installation of DIN rail equipment in accordance with DIN 43880
- with blanking strips for unused DIN rail openings
- order PE/N terminals separately
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed




Assembly example:
Removable DIN rail rack for earth connection



Mi 1446

**36 modules: 3 x 12 x 18 mm
without PE and N terminal
with additional DIN rail**


- 4-row
- with 1 DIN rail 216 mm wide (for installation depth of 72 mm)
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed



Mi 1455

**56 modules: 2 x 28 x 18 mm
without PE and N terminal**


- 2-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection



Mi 1683 NEW

**80 modules: 2 x 28 x 18 mm and
2 x 12 x 18 mm
without PE and N terminal**


- 3-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- cable entry only possible via flange



Mi 1885

**84 modules: 3 x 28 x 18 mm
without PE and N terminal**

- 3-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- cable entry only possible via flange




Assembly example:
Removable DIN rail rack for earth connection



Mi 1119

**12 modules: 1 x 12 x 18 mm
without PE and N terminal**


- 1-row
- with 1 hinged flap
- hinged flap lockable with accessories
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed



Mi 1229

24 modules: 2 x 12 x 18 mm


- 2-row
- with 2 hinged flaps
- hinged flap lockable with accessories
- for installation of DIN rail equipment in accordance with DIN 43880
- without PE and N terminal
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed



Mi 1339

**36 modules: 3 x 12 x 18 mm
without PE and N terminal**


- 3-row
- with 3 hinged flaps
- hinged flap lockable with accessories
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed



Mi 1449

**48 modules: 4 x 12 x 18 mm
without PE and N terminal**

- 4-row
- with 4 hinged flaps
- hinged flap lockable with accessories
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- with removable DIN rail rack and earth connection
- DIN rail rack can be earthed



Assembly example:
Removable DIN rail rack for earth connection




Connection Box	313
Extension frames, DIN rails, spacers	314 - 315
Mounting plates, fixing screws	316 - 317
Covers, blanking strips	318 - 319
Terminals	320- 322
Wall gasket, wall separator, fixing spares	323
Flanges, ventilation flanges, metal inserts for flanges (BS)	324 - 326
Canopy	327
Conversion kits for lid fasteners	328
Hinges for lids	329
Hinged flap, protection covers for hinged flaps	330
Components for wall mounting	331



Mi CB 10
Connection Box

- for the installation of devices that must be operated externally, such as plug devices, push buttons and switches
- for mounting to box walls 300 mm
- hinged mounting area
- with wall gasket



Example:


The Connection Box allows a simple and fast installation of devices that must be operated externally.






Mi ZR 4
**Extension frame
for enclosure size 4**

- for extension of the installation depth by 85 mm
- degree of protection IP 65 is maintained with use of up to two extension frames
- inclusive fixing material



Mi ZR 8
**Extension frame
for enclosure size 8**

- for extension of the installation depth by 85 mm
- degree of protection IP 65 is maintained with use of up to two extension frames
- inclusive fixing material




Mi TS 15
**DIN rail
length 134 mm**

- in accordance with DIN EN 60715
- for Mi Empty box size 1
- for equipment or terminals with clip-on mounting
- with fixing screws



Mi TS 30
**DIN rail
length 284 mm**

- in accordance with DIN EN 60715
- for Mi empty box sizes 1 to 8
- for equipment or terminals with clip-on mounting
- with fixing screws



Mi TS 45
**DIN rail
length 434 mm**

- in accordance with DIN EN 60715
- for Mi empty box size 3
- for equipment or terminals with clip-on mounting
- with fixing screws



Mi TS 60
**DIN rail
length 584 mm**

- in accordance with DIN EN 60715
- for Mi empty box sizes 4 and 8
- for equipment or terminals with clip-on mounting
- with fixing screws





Mi DS 25

**Spacer
height: 25 mm**

- for spacing DIN-rails Mi TS ..
- 2 pieces
- with fixing screws for base of box and DIN rail



Mi DS 50

**Spacer
height: 50 mm**

- for spacing DIN-rails Mi TS ..
- 2 pieces
- with fixing screws for base of box and DIN rail




Mi MP 1

**Mounting plate
W 259 x H 115 mm**

- material thickness 4 mm
- for Mi-Empty boxes sizes 1, 2, 3, 4
- with fixing screws

Lami-
nated
paper




Mi MP 2

**Mounting plate
W 265 x H 265 mm**

- material thickness 4 mm
- for Mi-Empty boxes sizes 2 to 8
- with fixing screws

Lami-
nated
paper




Mi MP 3

**Mounting plate
W 265 x H 415 mm**

- material thickness 4 mm
- for Mi-Empty boxes sizes 3, 4, 6
- with fixing screws

Lami-
nated
paper




Mi MP 4

**Mounting plate
W 265 x H 565 mm**

- material thickness 4 mm
- for Mi-Empty boxes sizes 4, 8
- with fixing screws

Lami-
nated
paper




Mi MP 8

**Mounting plate
W 565 x H 565 mm**

- material thickness 4 mm
- for Mi Empty box size 8
- with fixing screws

Lami-
nated
paper





Mi BZ 11

**Fixing screw
length 11 mm**

- for assembling DIN rails or mounting plates at the base of the box
- for material thicknesses of 1 to 2.5 mm
- self-tapping
- galvanised



Mi BZ 13


**Fixing screw
length 13 mm**

- for assembling DIN rails or mounting plates at the base of the box
- for material thicknesses of 2.5 to 4 mm
- self-tapping
- galvanised




Mi EP 01
Cover
for Mi Empty box size 1

- for retrofitting
- cover without cut-outs made of plastics, as protection cover or for the installation of devices
- with fastening material




Mi EP 02
Cover
for Mi Empty box size 2

- for retrofitting
- cover without cut-outs made of plastics, as protection cover or for the installation of devices
- with fastening material




Mi EP 03
Cover
for Mi empty box size 3

- for retrofitting
- cover without cut-outs made of plastics, as protection cover or for the installation of devices
- with fastening material



Mi EP 04
Cover
for Mi Empty box size 4

- for retrofitting
- cover without cut-outs made of plastics, as protection cover or for the installation of devices
- with fastening material





AS 12

**Blanking strip
12 modules**

- 12 x 18 mm, divisible every 9 mm
- for the covering of spare equipment openings, for material thickness up to 3 mm



AS 18

**Blanking strip
18 modules**

- 18 X 18 mm, divisible every 9 mm
- for the covering of spare equipment openings, for material thickness up to 3 mm






FC L 10

Terminal
2 x 25 mm², 8 x 4 mm², Cu


- for installation on DIN rails in accordance with IEC 60 715, top hat profile 35 mm
- FIXCONNECT® plug-in technology, for terminal technology refer to index technical data
- current carrying capacity: 80 A



FC N 10

N terminal
2 x 25 mm², 8 x 4 mm², Cu


- for installation on DIN rails in accordance with IEC 60 715, top hat profile 35 mm
- FIXCONNECT® plug-in technology, for terminal technology refer to index technical data
- current carrying capacity: 80 A



FC PE 10

PE terminal
2 x 25 mm², 8 x 4 mm², Cu


- for boxes with 1 x 12 modules (through terminal reduction to 9 modules)
- for installation on DIN rails in accordance with IEC 60 715, top hat profile 35 mm
- FIXCONNECT® plug-in technology, for terminal technology refer to index technical data
- current carrying capacity: 80 A



FC PN 10

PE and N terminal
per PE/N 1 x 25 mm², 4 x 4 mm² Cu

- for installation on DIN rails in accordance with IEC 60 715, top hat profile 35 mm
- FIXCONNECT® plug-in terminal technology, for terminal technology refer to technical data
- current carrying capacity: 80 A



FC BS 5

FIXCONNECT labelling system
set with 5 pieces

- labelling system for FIXCONNECT plug-in terminals, not for terminals 2x25 / 4x4 mm²
- for attaching of labelling strips or marking with felt tip pen



FC PN 30

**PE and N terminal
per PE/N 3 x 25 mm², 12 x 4 mm², Cu**

- 1-row
- FIXCONNECT® plug-in technology,
for terminal technology refer to index technical data
- current carrying capacity: 80 A

PE+N x cross section	3 x 25 mm ² 12 x 4 mm ² 1-row
conductor material	Cu



FC PN 60

**PE and N terminal
per PE/N 6 x 25 mm², 24 x 4 mm², Cu**

- 2-row
- FIXCONNECT® plug-in technology,
for terminal technology refer to index technical data
- current carrying capacity: 80 A
- Not applicable in boxes Mi 1456, Mi 1455, Mi 1884 and Mi 1885

PE+N x cross section	6 x 25 mm ² 24 x 4 mm ² 2-row
conductor material	Cu



FC N 30

**N terminal
per N 6 x 25 mm², 24 x 4 mm², Cu**

- 1-row
- FIXCONNECT® plug-in technology,
for terminal technology refer to index technical data
- current carrying capacity: 80 A

number x cross-section per N	6 x 25 mm ² 24 x 4 mm ² 1-row
conductor material	Cu



FC PE 30

**PE terminal
per PE 6 x 25 mm², 24 x 4 mm², Cu**

- 1-row
- FIXCONNECT® plug-in technology,
for terminal technology refer to index technical data
- current carrying capacity: 80 A

number x cross-section per PE	6 x 25 mm ² 24 x 4 mm ² 1-row
conductor material	Cu




KKL 25

Connecting terminal

Rated connecting capacity: 6-35 mm², Cu

- as a connecting terminal
- for installation on DIN rails in accordance with IEC 60 715, top hat profile 35 mm
- current carrying capacity: 102 A
- 1-pole 6 x 6 mm² sol, 6 x 10 mm² sol/ f*, 4 x 16 mm² s/ f*, 4 x 25 mm² s/ f*, 2 x 35 mm² s/ f* each
f* = with gas-tight end ferrule
- with two connected clamping units



rated insulation voltage	U _i = 690 V a.c./d.c.
Dismantling length	16 mm
tightening torque for terminal	3,0 Nm



KKL 34

Main line branch terminal

per pole 4 x 1.5-25 mm² as L1-L3, Cu

- 3-pole as connecting terminal 25 mm²
- for installation on DIN rails in accordance with IEC 60 715, top hat profile 35 mm
- current carrying capacity: 80 A
- width: 61 mm



KKL 48

Main line branch terminal

**per pole 4 x 1.5-25 mm² as L1-L3;
8 x 1.5-25 mm², as N, Cu**

- 4-pole as connecting terminal 25 mm²
- for installation on DIN rails in accordance with IEC 60 715, top hat profile 35 mm
- current carrying capacity: 80 A
- width: 100 mm



KKL 54

Main line branch terminal

**per pole 4 x 1.5-25 mm² as L1-L3;
4 x 1.5-25mm² as N;
4 x 1.5-25 mm² as PE, Cu**

- 5-pole as connecting terminal 25 mm²
- for installation on DIN rails in accordance with IEC 60 715, top hat profile 35 mm
- current carrying capacity: 80 A
- width: 100 mm






Mi WD 2

Wall gasket for box walls 150/300 mm

- for the assembly of Mi boxes
- consisting of 1 seal, 4 wedge links, 1 bracket



Mi WT 1

Wall separator

- for subdivision of 300 mm box walls into 2 x 150 mm in case of flange or box assembly



Mi BE

Fixing spares 4 connectors

- for the assembly of Mi boxes
- when converting existing installations




Mi FP 15

**Flange
without knockouts**

- box wall 150 mm
- with fixing wedges and seal


mounting width	65 mm
mounting height	88 mm



Mi FM 15

**Flange
knockouts 3 x M 20, 1 x M 32/40/50**

- box wall 150 mm
- with fixing wedges and seal




Mi FP 20

**Flange
without knockouts**

- box wall 300 mm
- with fixing wedges and seal


mounting width	215 mm
mounting height	88 mm



Mi FM 20

**Flange
knockouts 15 x M 16, 15 x M 20**


- box wall 300 mm
- with fixing wedges and seal



Mi FM 25

**Flange
knockouts: 19 x M 16/25**

- box wall 300 mm
- with fixing wedges and seal



Mi FM 32

**Flange
knockouts: 8 x M 25/32, 1 x M 25/32/40**

- box wall 300 mm
- with fixing wedges and seal



Mi FM 40

**Flange
knockouts: 2 x M 25/32, 5 x M 32/40**

- box wall 300 mm
- with fixing wedges and seal






Mi FM 50

Flange

knockouts: 2 x M 20, 4 x M 32/40/50

- box wall 300 mm
- with fixing wedges and seal




Mi FM 60

Flange

knockouts: 3 x M 40/50/63

- box wall 300 mm
- with fixing wedges and seal




Mi FP 38

Flange

sealing range Ø 7-29 mm

- cable entry via integrated elastic membranes
- sealing range: 29 x Ø 7-12 mm, 4 x Ø 7-14 mm, 4 x Ø 11-20 mm, 1 x Ø 16-29 mm
- box wall 300 mm
- with fixing wedges and seal




Mi FP 70

Flange

sealing range: 1 x Ø 30-72 mm

- box wall 300 mm
- with fixing wedges and seal




Mi FP 72

Flange

sealing range: 2 x each Ø 30-72 mm

- box wall 300 mm
- with fixing wedges and seal




Mi FM 63

Flange with cable arrangement space

knockouts: 3 x M 40/50/63

- box wall 300 mm
- with fixing wedges and seal






Mi FP 82

Cable insert
sealing range: 2 x each Ø 30-72 mm

- box wall 300 mm
- divisible for cable insertion from the front
- degree of protection IP 54 only with additional strain and pressure relief (e.g. Mi ZE 62)



Mi ZE 62

Cable strain relief
for 2 cables with max. 60 mm external diameter

- with fixing rail 284 mm long
- to be used only in connection with cable insertion Mi FP 82



Mi GS 30

Box fin
for inserting cables across 2 boxes


- for box walls 300 mm
- removable
- can be retrofitted



Mi BF 44

Ventilation flange
for vertical installation on box walls

- box wall 300 mm
- for ventilation of Mi-Distribution boards in the event of extremely high internal temperatures or a risk of water condensation



BE 44

Ventilation insert






BM 32

Pressure compensation element for M 32 knockouts

- for the reduction of condensation by pressure compensation in power distribution systems
- ISO thread M 32 x 1.5
- bore-hole: \varnothing 32.3 mm
- wall thickness of up to 8 mm
- with counter nut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25° to + 55° C
- In order not to exceed leakage limit of 0.07 bar with pressure compensation, one pressure compensation element BM 32 must be used per 42 litres (42000 cm³) of enclosure volume.
- Example: enclosure size 30 cm x 60 cm x 17 cm = 30600 cm³ = 30,6 litres. Number of necessary BM 32 (M32) = 1 piece.


IP	ASA/PC Blend	RAL
65		7016



Mi DB 15

Canopy for box wall 150 mm


- with fixing wedges and seal
- suitable for outdoor installation, UV resistant



Mi DB 30

Canopy for 300 mm box walls

- with fixing wedges and seal
- suitable for outdoor installation, UV resistant



Mi DB 01

Canopy end plate

- for canopies FP DB xx and Mi DB xx



Pressure compensation element BM 32



Canopy





Mi PL 2

Sealing cap

- 2 sealing caps for converting the lid fasteners



Mi SR 4

**Conversion set
for manual operation on tool operation**

- 4 fastening covers



Mi SN 4

**Conversion set
for converting lid fasteners from tool to manual operation**

- 4 manual actuators



Mi DV 01

Locking device insertion

- only in connection with Mi PL 2, Mi SR 4 or Mi SN 4



Mi ZS 11

**Lid lock
with locking device I**

- Is being used instead of fasteners for hand or tool operation in order to prevent unauthorised opening of the lids
- consisting of: cylinder lock, keys, locking device insertion, dust cover



Mi ZS 12

**Lid lock
with locking device II**

- Is being used instead of fasteners for hand or tool operation in order to prevent unauthorised opening of the lids
- consisting of: cylinder lock, keys, locking device insertion, dust cover



Mi DR 04

**Lid fastener for tool operation
triangle 8 mm**

- is used instead of fasteners for hand- or tool operation, in order to make unauthorised opening of lids more difficult
- 4 locking devices with triangle 8 mm and key



DS 1

Triangular key 8 mm



Mi ZS 20
Mi hinge for lids
for Mi boxes sizes 1, 2, 3, 4

- For operating installation device within a large area. The lid keeps permanently connected to the box.
- When assembling several boxes, the insertion can only be carried out for the external boxes.



Mi ZS 40
Mi hinge for lids
for Mi boxes sizes 1 to 8

- For operating installation device within a large area. The lid keeps permanently connected to the box.
- Wall connectors or flanges are necessary for assembly
- Not applicable in boxes with covers



Mi ZS 60
Mi hinge for lids
for Mi boxes sizes 4 and 8 with extension frame

- For operating installation device within a large area. The lid keeps permanently connected to the box.
- Wall connectors or flanges are necessary for assembly
- Not applicable in boxes with covers

Example:


Mi hinges for lids enable to operate installation device within a large area






Mi KL 6
Hinged flap
opening dimensions 117 x 60 mm

- with drill and saw template
- modules 1 x 6 x 18 mm
- sealable
- lockable with hinged flap lock
- inclusive fixing material
- wall thickness 1.5-4.5 mm



Mi KL 12
Hinged flap
opening dimensions 220 x 60 mm


- with drill and saw template
- modules 1 x 12 x 18 mm
- sealable
- lockable with hinged flap lock
- inclusive fixing material
- wall thickness 1.5-4 mm



Mi BS 6
Protection cover
for Mi KL 6

- with fixing screws


modules	6 1 x 6 x 18 mm
---------	--------------------



Mi BS 12
Protection cover
for Mi KL 12

- with fixing screws

modules	12 1 x 12 x 18 mm
---------	----------------------




Mi SK 01
Hinged flap lock

- for retrofitting in hinged flaps of 6 or 12 modules width
- for protecting the switchgear located behind the hinged flap against unauthorised access (only effective in connection with lid lock Mi ZS ..)
- consisting of:
- 1 lock (Mi KL), 2 keys, 1 grooved pin



NZ KL 54
KWH meter window flap
standard opening dimensions 140 x 310 mm

- in accordance with DIN 43 870
- for tool or manual operation
- can be locked with padlock (clip diameter max. 6 mm)
- complete with screws
- sealable





Mi SA 2

Dust protection cover

- for box sizes 1 to 4
- for 2 lid fittings



Mi AL 40

4 stainless steel external brackets

- for external fixing of enclosures




Mi MS 2

Profile for wall mounting

- for Mi distribution board assemblies up to 900 x 1200 mm
- with 8 screws M6 x 16, washers and nuts for mounting enclosures

length	1950 mm
Material	sendzimir galvanised steel profile with structured powder coating

**RAL
7016**




MX 0112

**Frame connector set
for constructing a mounting frame**

- fixing elements for T or L connections
- consisting of: 2 couplers with screws and nuts


**Sheet
steel**



MX 0111

Screw for box fixing

- set with 12 pieces
- M 6 x 16
- self-tapping for fixing the Mi box onto mounting profile MX 0101



Varnish pen RAL 7016

12 ml

**RAL
7016**



Operating and ambient conditions	333
Standards and regulations	334
Dimensions in mm	335
Rated power dissipation of empty boxes	336 - 337
Terminal technology	338
Opening enclosure walls, assembly	339
Flanges, Cable entry	340
Device installation, mounting plates, DIN rails, covers	341 - 342
Wall mounting, floor-standing	343

	Empty enclosures Mi 0... Mi 9...	Circuit breaker boxes Mi 1...
Application area	Suitable for indoor installation and outdoor installation, protected against weather influences However, pay attention to the climatic effects on the installed equipment , for example, high or low ambient temperatures or formation of condensed water see technical information	
	Resistance to occasional cleaning procedures (direct jet) with high-pressure cleaner without cleaning additives, water pressure: max 100 bar, water temperature: Max. 80° C, distance => 0.15 m, in accordance with IP 69K requirements, single enclosure without lid equipment (no enclosure assembly), enclosure and cable glands at least IP 65.	
Ambient temperature		
- Average value over 24 hours	-	+ 35° C
- Maximum value	+ 70° C	+ 40° C
- Minimum value	- 25° C	- 5° C
		The ambient temperature is reduced at distribution boares by the installed equipment technology!
Relative humidity		
- short-time	-	50% at 40° C
		100% at 25° C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws: Minimum requirements - Glow wire test in accordance with IEC 60 695-2-11: - 650° C for boxes and cable glands - 850° C for conducting components	
Burning behaviour		
- Glow wire test IEC 60 695-2-11	960° C	960° C
- UL Subject 94	V-2 flame-retardant self-extinguishing	V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK 08 (5 Joule)	IK 08 (5 Joule)
Toxic behaviour	halogenfree ¹⁾ silicone-free	halogenfree ¹⁾ silicone-free

¹⁾ "Halogen-free" in accordance with IEC 754-2 "Common test methods for cables - Determination of the amount of halogen acid gas".

For material properties see technical data.

Mi Distribution Boards comply with the require- ments of the IEC 61 439-2

Distribution boards assembled and wired according to manufacturer data without essential deviations from the original type or system.

To meet these requirements for Hensel Mi Distribution Boards, the following must be noted:

1. The distribution boards must consist of the verified enclosures documented in this list.
2. The wiring of the equipment must be carried out with the cross-sections and conductor types indicated in Table "Rating of insulated conductors in switchgear assemblies", Index Techniques.
3. Once the distribution board is completed, a routine test must be carried out in accordance with this standard.
4. The test must be certified with a test report.
5. The assembly must be provided with a manufacturer's identification mark.
Compliance with important data such as
 - limit of temperature rise
 - dielectric strength
 - IP degrees of protection
 - creepage distances and clearances
 is verified for this system.


Standards and regulations

- IEC 61 439-2
Low-voltage switchgear and controlgear assemblies –
Part 2: Power switchgear and controlgear assemblies
- IEC 60 999, connecting devices
Safety requirements for screw-type and screwless-type clamping units
for electrical copper conductors
- DIN EN 50 262
Metric threaded cable glands for electrical installations
- DIN 43 880
Built-in equipment for electrical installations; overall dimensions
and related mounting dimensions
- IEC 60 529 / DIN VDE 0470 Teil 1
Degrees of protection provided by enclosures (IP-Code)


Dimensions of the interior installation depth with installed mounting plates.

The width of Mi Empty boxes Mi 9... enlarges about 15 mm because of the laterally mounted lid hinges, refer to product pages.


= usable installation space with mounted cable glands




Mi 0100
Mi 0101
Mi 9100
Mi 9101




Mi 0200
Mi 0201
Mi 9200
Mi 9201

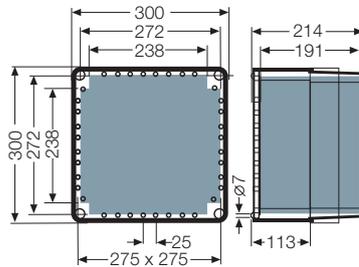


Mi 0210
Mi 0211
Mi 9210
Mi 9211



Mi 0220
Mi 0221



Mi 0300
Mi 0301
Mi 9310
Mi 9311


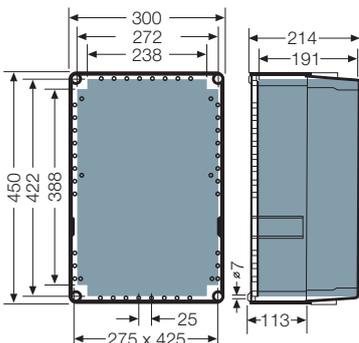


Mi 0310
Mi 0311
Mi 9310
Mi 9311


Installation of equipment in protection plates:

Pre-drill the sections at the corners, then saw away the section from the protection plate by using a piercing saw at middle to low cutting speed.

Use coarse toothed saw blades for plastics (e.g. Bosch T 101 B).

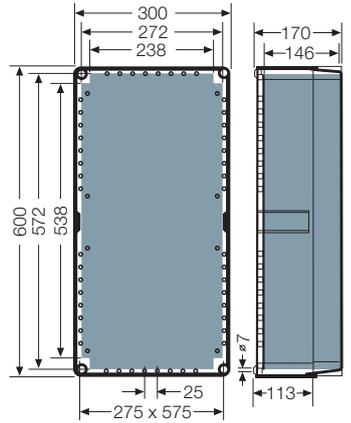


Mi 0400
Mi 0401
Mi 9400
Mi 9401

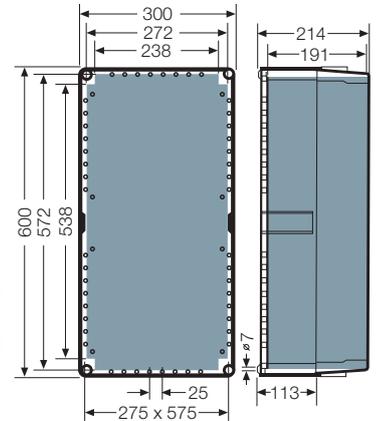


Mi 0410
Mi 0411
Mi 9410
Mi 9411



Mi 0600
Mi 0601

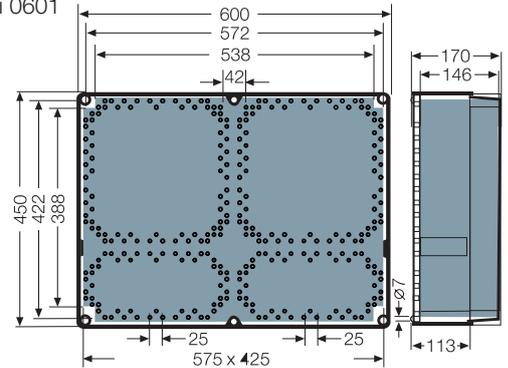

Mi 0800
Mi 0801

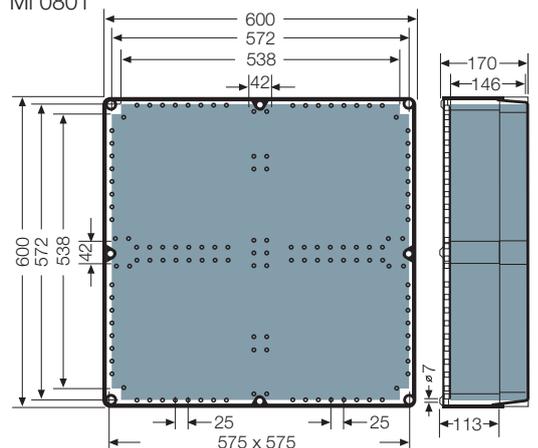


Temperature rise ($\Delta\theta$) with Mi-Distribution boards
by power dissipation of electrical devices

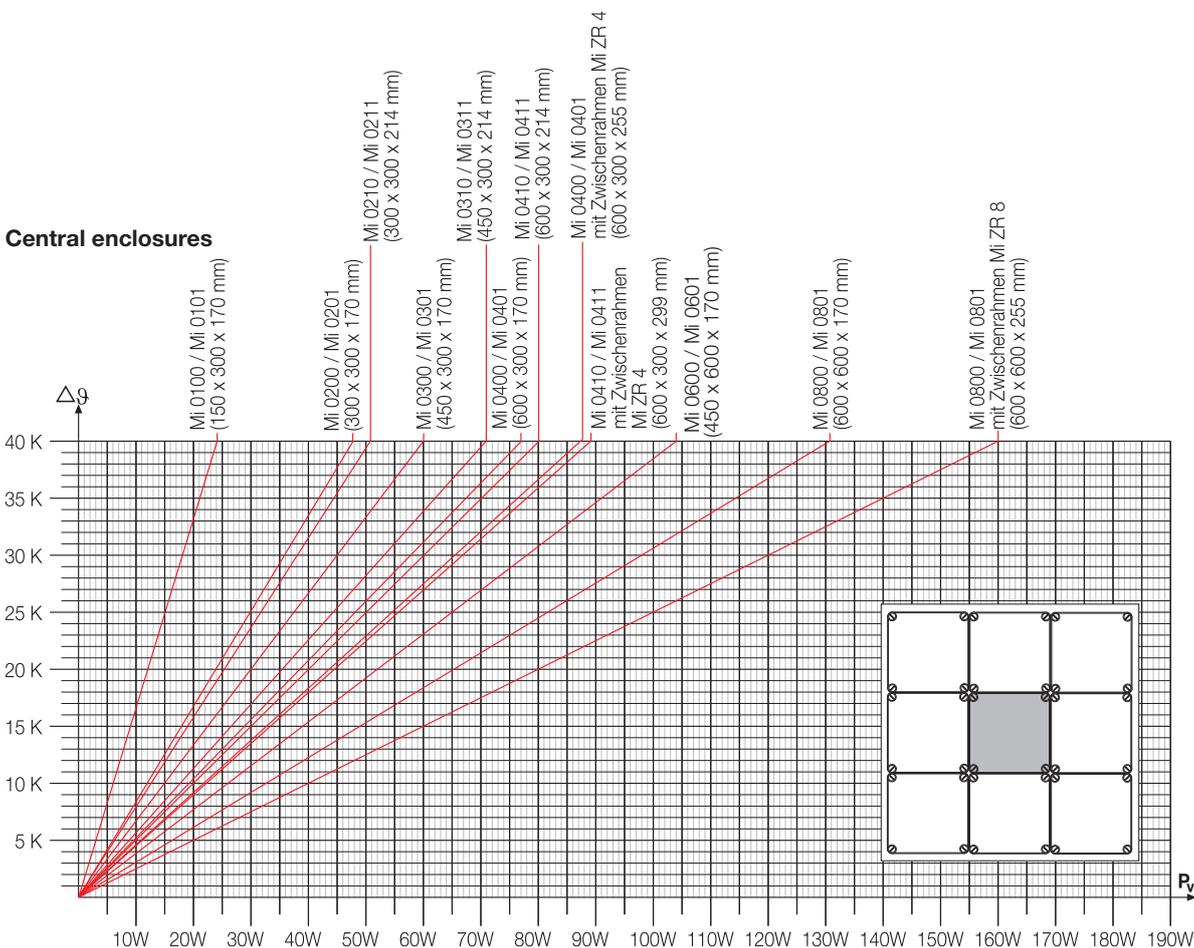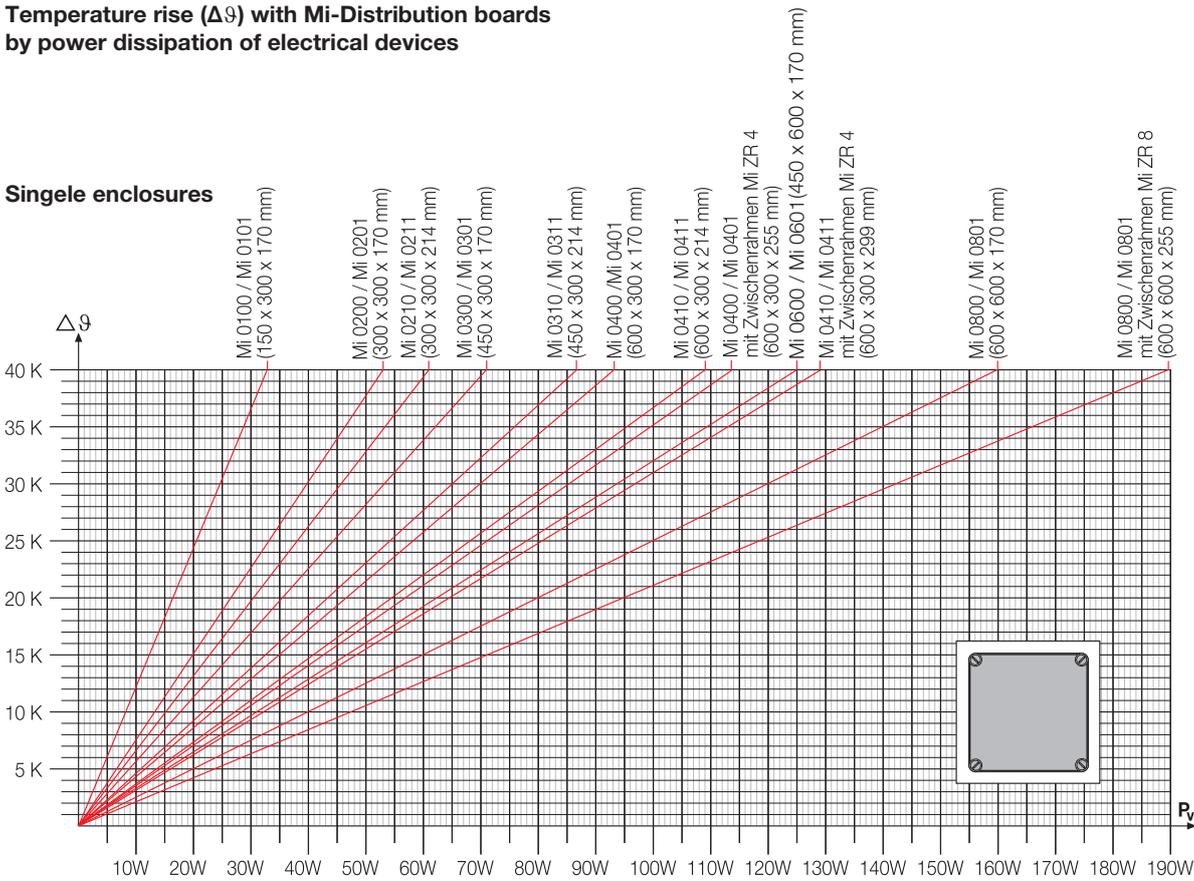

Temperature rise ($\Delta\vartheta$) with Mi-Distribution boards by power dissipation of electrical devices

External enclosures

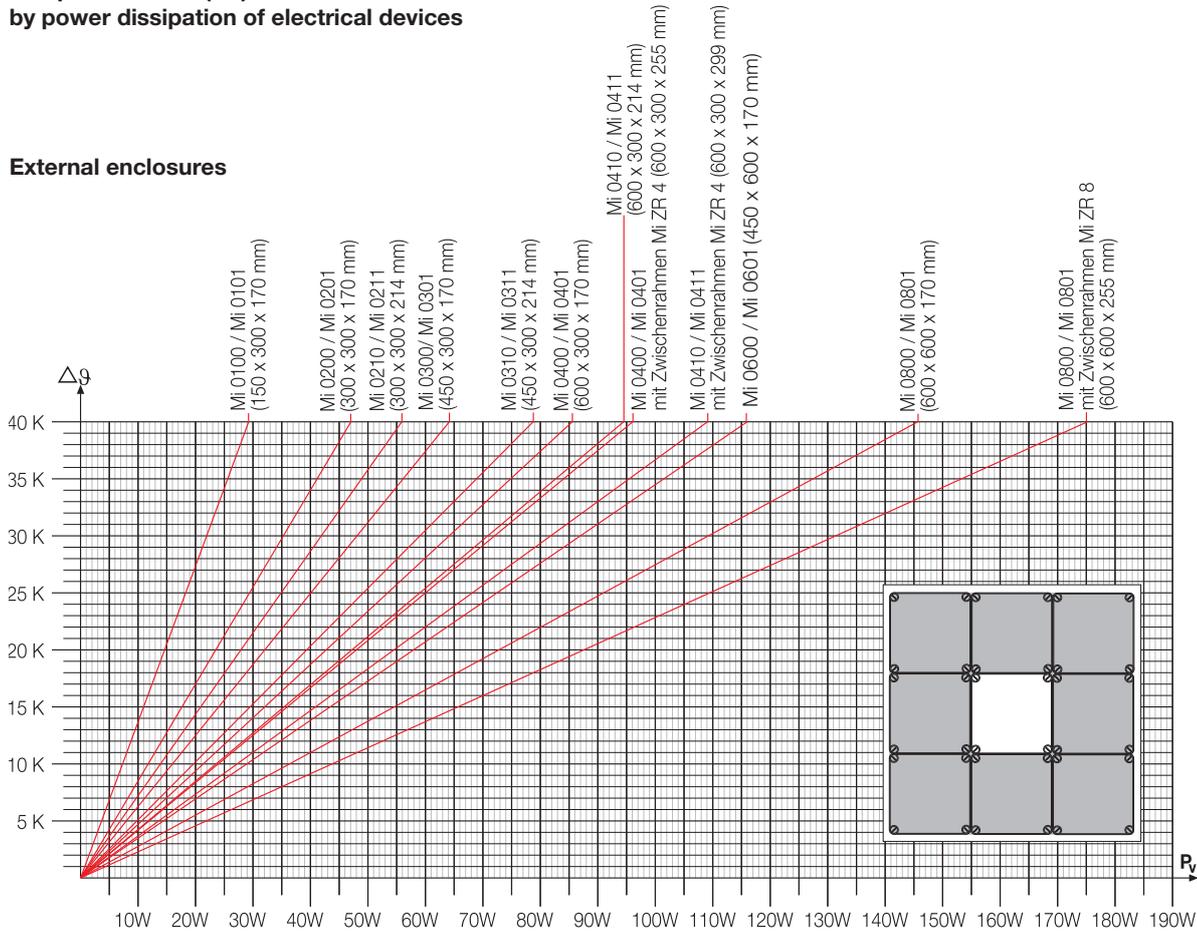

Note!

The maximally permissible operating temperature inside the enclosures (ϑ_{imax}) is determined by:

- 1st Maximally permissible ambient temperature of the installed electrical devices (please consider data of the equipment manufacturers)
- 2nd Category temperature of the internal wiring and the inserted cables
- 3rd Temperatur resistance of the enclosure materials and the cable entries etc.

Example: Computation of the maximum rated power dissipation (P_V)

Maximally permissible operating temperature inside the enclosure(s) (ϑ_{imax}):	e.g. 55° C
Ambient temperature of the enclosure(s) (ϑ_U):	25° C
Maximally permissible heating up inside the enclosure:	$\Delta\vartheta = \vartheta_{imax} - \vartheta_U = 55^\circ\text{C} - 25^\circ\text{C} = 30\text{K}$
Maximum permissible power dissipation of the installed equipment inclusive wiring (P_V) in accordance with diagram:	Enclosure size 3 (540 x 270 x 163 mm)
Single enclosure:	$P_V = 53\text{W}$
Central enclosure:	$P_V = 45\text{W}$
External enclosure:	$P_V = 48\text{W}$

Example: Computation of the operating temperature inside the enclosure (ϑ)


Ambient temperature of the enclosure(s) (ϑ_U):	25° C
Rated power dissipation of the installed electrical equipment (P_V):	30 W
Heating up inside the enclosures in accordance with diagram over:	$\Delta\vartheta$
Enclosure size 3 (540 x 270 x 163 mm) single enclosure:	$\Delta\vartheta = 17\text{K}; \vartheta_i = \vartheta_U + \Delta\vartheta = 25^\circ\text{C} + 17\text{K} = 42^\circ\text{C}$
Enclosure size 3 (540 x 270 x 163 mm) central enclosure:	$\Delta\vartheta = 20\text{K}; \vartheta_i = \vartheta_U + \Delta\vartheta = 25^\circ\text{C} + 20\text{K} = 45^\circ\text{C}$
Enclosure size 3 (540 x 270 x 163 mm) external enclosure:	$\Delta\vartheta = 19\text{K}; \vartheta_i = \vartheta_U + \Delta\vartheta = 25^\circ\text{C} + 19\text{K} = 44^\circ\text{C}$

PE und N

FIXCONNECT®-Klemme

Rated connecting capacity of PE and N terminals

Current carrying capacity:
 80 A

Clamping unit	Corresponding cross-sections / copper			
	max. number	from - to max.	max. number	from - to max.
 Screw-type terminal 25 mm²	1	25 mm², s	1	25 mm², f
	1	16 mm², s	1	16 mm², f
	1	10 mm², sol	1	10 mm², f
	3	6 mm², sol	1	6 mm², f
	3	4 mm², sol	1	4 mm², f
	4	2.5 mm², sol	1	2.5 mm², f
4	1.5 mm², sol	1	1.5 mm², f	
 Plug-in terminal 4 mm²	1	1.5 - 4 mm², sol	1	1.5 - 4 mm², f
				Without end ferrule; clamping unit has to be opened with a tool when conductor is inserted.

Tested as connecting terminal for several conductors of the same cross-sections for using in one circuit

Terminal equipment and number of conductors to be connected

PE terminal

Number of modules	Mounted in Mi Circuit breaker boxes	PE terminal	
		up to 4 mm²	up to 25 mm²
24 (2-row)	Mi 1224		
	Mi 1220		
	Mi 1222	12x4 mm²	2x25 mm²
36 (3-row) 48 (4-row)	Mi 1336		
	Mi 1333		
	Mi 1448	24x4 mm²	6x25 mm²
	Mi 1444		

N terminal

Number of modules	Mounted in Mi Circuit breaker boxes	N terminal		plug-in jumper
		up to 4 mm²	up to 25 mm²	
24 (2-row)	Mi 1224			
	Mi 1220			
	Mi 1222	12x4 mm²	3x25 mm²	
36 (3-row) 48 (4-row)	Mi 1336			
	Mi 1333			
	Mi 1448	24x4 mm²	6x25 mm²	
	Mi 1444			

Mi Distribution Boards Technical Details Opening Enclosure Walls, Assembly

Assembly of Mi distribution boards according to assembly draft

Pre-assembled and tested enclosures with electrical functions



Knock out of box walls for electrical connection and cable entry

Box walls are knocked out for the electrical connection within the distribution board.

For the assembly of the enclosures, the appropriate openings of the wedge joints are knocked out as well.




Assembly of boxes

For sealing the boxes in position, a self-adhesive wall gasket is stuck to the box wall (applies to closed box walls, too.)

The box assembly is carried out by a wedge connection.

To increase stability, press wall clamps onto the box fins.

Use a wall separator for subdividing 300 mm box walls into two 150 mm walls for flange or box mounting.

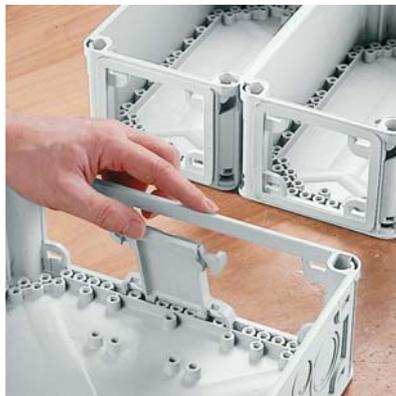



Flanges

Attach flanges by means of 4 wedge links and 1 clamp to the box wall.



Cable entry

Knock out the appropriate cable entries within flanges or box walls with screwdriver.

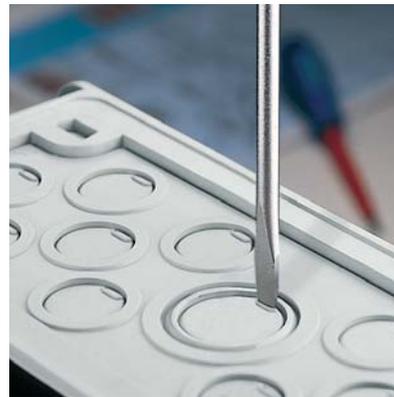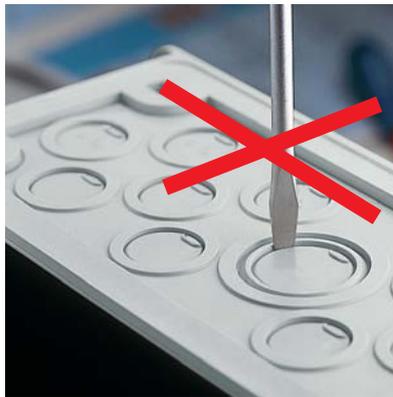

Assembly of cable insertion



Knock out the respective box wall and saw out the upper box fin next to the wedge fastening.



Screw mount the cable insertion and insert the rubber entries.

Adjust stepped grommets to the required cable cross section.

Insert cables and fix with cable ties.

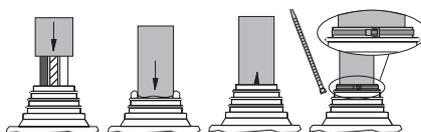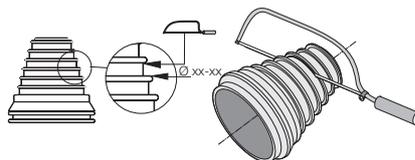

Insert the cable into the box from the front.




Mi Distribution Boards Technical Details Device Installation, Mounting Plates, DIN Rails

Device installation on mounting plates or DIN rails

Fasten installation devices on mounting plates with self-threading screws.

Screw mounting plate onto base of box.

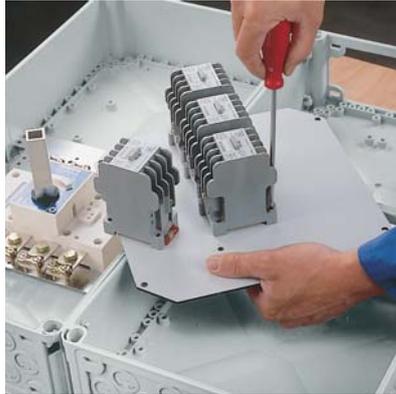

Mount DIN rails directly onto base of boxes or on spacers Mi DS .. in heights of 25 or 50 mm.




Installation of equipment in cover plates

Pre-drill the sections at the corners and saw out with piercing saw. Use saw blades with rough teeth for plastics.

Screw support for the protection cover Mi EP .. onto base of box.

Attach protection cover.

Close unused equipment openings in protection covers with attached blanking strips.

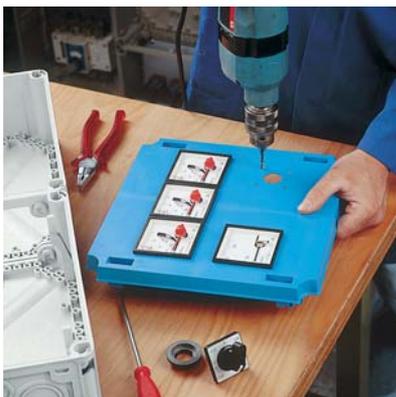


Device installation in circuit breaker boxes

Circuit breaker boxes can be fitted with any DIN rail equipment, if per row (12 modules 12x18 mm) the assigned backup fuse won't exceed 80 A.



Dimension of 1 module:
 1 Module = 18 mm



Dimensions according to DIN 43880
 for DIN rail mounted device

PE and N terminals for copper conductors (installed)



Note to Mi Circuit breaker boxes:
 Spare equipment openings in protection covers are to be covered with blanking strips to prevent accidental contact (blanking strips are enclosed for 50 % of equipment openings)

Protection covers

Cover unused equipment openings with blanking strips to prevent accidental contact.

Provide for total protection against access to hazardous parts for accessible devices and busbar-mounted equipment.


Protection class II, 
 (Total insulation)

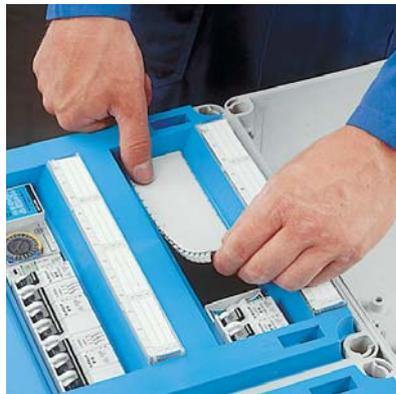

Mi Distribution Boards Technical Details Wall Mounting, Floor Mounting

Wall mounting



directly through the
base of the box



External brackets

for external box fixing

Mi AL 40 (4 brackets)



Mounting profile

for wall-mounted installation
of Mi-Distribution boards,
steel profile, 1950 mm long,
dividable in the grid
of 150 mm.


Mi MS 2




Note:

Please fix mounting profile
in vertical position to enable
a cable routing behind the
assembly.

For cutting the required
profile length fix mounting
profile eg with a clamp to a
desk.

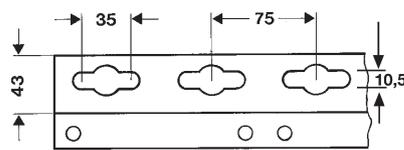

Fixing matrix of
mounting profile



Transport

Regarding transportation its
recommendable to protect the
assembly against deflection.
For that please screw the
assembly to a solid timber.